



MODEL L2559 CURRENT TRANSFORMER

1.13" ID

FEATURES

- Used for Ammeter Applications.
- Frequency 50 – 400 HZ.
Insulation Class 0.6 KV BIL 10 KV.
- Molded thermoplastic housing rated 94 V-0.
- Conforms to ANSI C57.13, UL 1244,
and applicable IEC standards.
- Secondary is available with
10VAC, and 5VAC rating.
- Termination is 8-32 Studs.
- Available as U.L. Recognized Component
File E100575, contact factory for information.
- Other primary current ratings, up to 400A,
are available upon request.

PART NUMBER	RATIO	ACCURACY @ 60HZ		NOMINAL SECONDARY WINDING RESISTANCE (OHMS)
		± %	BURDEN (VA)	
L2559-050-00	50:5A	3	2	.010
L2559-060-00	60:5A	2	2	.011
L2559-075-00	75:5A	2	2	.014
L2559-100-00	100:5A	1	2	.019
L2559-120-00	120:5A	1	2.5	.022
L2559-150-00	150:5A	1	4	.028
L2559-200-00	200:5A	1	4	.035
L2559-250-00	250:5A	1	6	.044
L2559-300-00	300:5A	1	8	.052
L2559-400-00	400:5A	1	10	.069

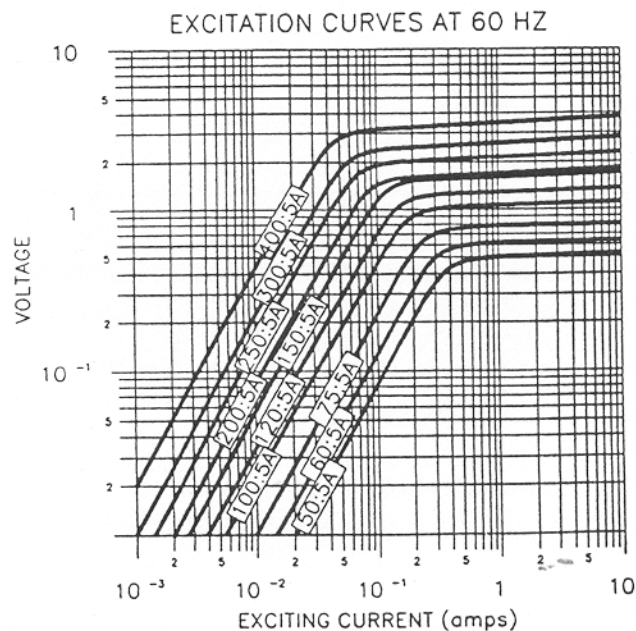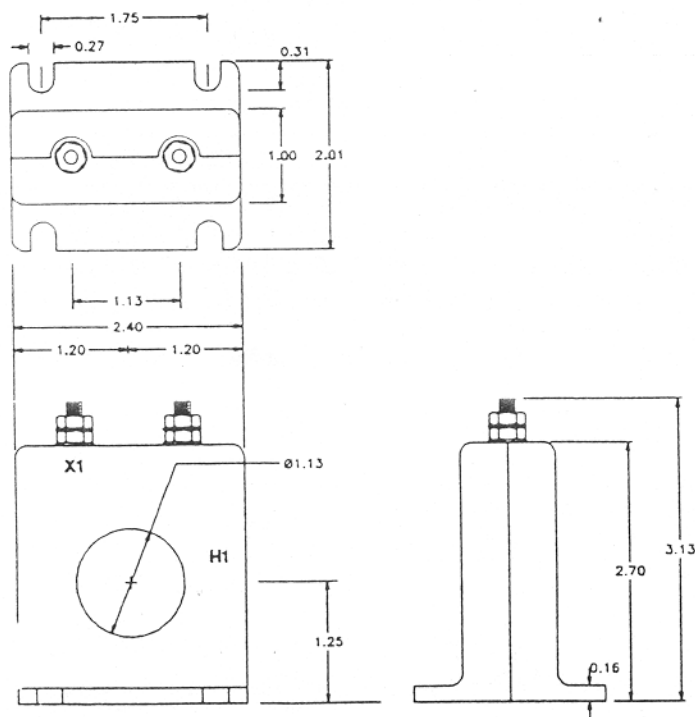

NOTE: ALL DIMENSIONS IN INCHES