



CURRENT TRANSFORMER MODEL L2C

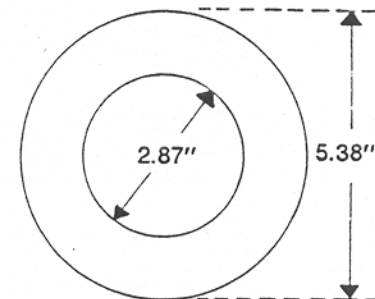

Application: Ammeters - wattmeters
Relays - cross current compensation

Frequency: 50-400 Hz

Insulation Class: .6 KV. BIL. 10KV

Continuous Current Rating Factor: 1.33 @ 30°C ambient,
1.00 @ 55°C ambient.

- Meets or exceeds UL 1244, ANSI C-57-13 and IEC standards
- Leads are #16 AWG, 24" Long 105°C. UL and CSA Approved
- Leads can be any length
- Terminals are brass studs 8-32 UNC provided with flat washer and hex nut

- Taps at any intermediate ratio can be provided
- Mounting brackets are factory installed, See next page for specifications
- Flame retardant molded nylon fiberglass case

P/N	RATIO	ANSI CLASS @ 60 Hz				BURDEN
		B 0.1	B 0.2	B 0.5	B 1	
L2C-200	200/5	.6	.6	1.2	-	20 VA
L2C-250	250/5	.3	.6	1.2	1.2	20 VA
L2C-300	300/5	.3	.3	.6	1.2	30 VA
L2C-400	400/5	.3	.3	.6	1.2	40 VA
L2C-500	500/5	.3	.3	.3	.6	50 VA
L2C-600	600/5	.3	.3	.3	.6	75 VA
L2C-750	750/5	.3	.3	.3	.3	80 VA
L2C-800	800/5	.3	.3	.3	.3	90 VA
L2C-1000	1000/5	.3	.3	.3	.3	110 VA
L2C-1200	1200/5	.3	.3	.3	.3	125 VA
L2C-1500	1500/5	.3	.3	.3	.3	135 VA
L2C-1600	1600/5	.3	.3	.3	.3	145 VA
L2C-1800	1800/5	.3	.3	.3	.3	145 VA
L2C-2000	2000/5	.3	.3	.3	.3	160 VA

Excitation curves and secondary resistance available on request.

ALL DIMENSIONS INDICATED IN INCHES.