

CURRENT TRANSFORMER MODEL L2E


Application: Ammeters - wattmeters
Relays - cross current compensation

Frequency: 50-400 Hz


Insulation Class: .6 KV. BIL. 10KV

Continuous Current

Rating Factor: 1.33 @ 30°C ambient,
1.00 @ 55°C ambient.

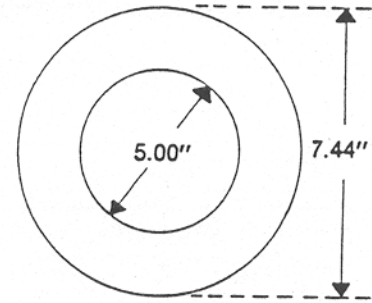

- Meets or exceeds UL 1244, ANSI C-57-13 and IEC standards
- Leads are #16 AWG, 24" Long 105°C. UL and CSA Approved
- Leads can be any length
- Terminals are brass studs 8-32 UNC provided with flat washer and hex nut
- Taps at any intermediate ratio can be provided
- Mounting brackets are factory installed, See next page for specifications
- Flame retardant molded nylon fiberglass case



P/N	RATIO	ANSI CLASS @ 60 Hz					RELAY Class
		B-0.1	B-0.2	B-0.5	B-1.0	B-2.0	
L2E-500	500/5	.6	1.2	1.2	1.2	2.4	C10
L2E-600	600/5	.3	.3	.3	.6	1.2	C20
L2E-750	750/5	.3	.3	.3	.6	1.2	C20
L2E-800	800/5	.3	.3	.3	.6	1.2	C20
L2E-1000	1000/5	.3	.3	.3	.6	.6	C50
L2E-1200	1200/5	.3	.3	.3	.3	.3	C50
L2E-1500	1500/5	.3	.3	.3	.3	.3	C50
L2E-1600	1600/5	.3	.3	.3	.3	.3	C100
L2E-2000	2000/5	.3	.3	.3	.3	.3	C100
L2E-2500	2500/5	.3	.3	.3	.3	.3	C100
L2E-3000	3000/5	.3	.3	.3	.3	.3	C100
L2E-4000	4000/5	.3	.3	.3	.3	.3	C100
L2E-5000	5000/5	.3	.3	.3	.3	.3	C100
L2E-6000	6000/5	.3	.3	.3	.3	.3	C100

Excitation curves and secondary resistance available on request.

ALL DIMENSIONS INDICATED IN INCHES.

© 1984 W.I.C.C. Ltd.

PAGE 2-41